

IN21131, IN21132 INSTALLATION INSTRUCTIONS

1500 Cherokee Parkway, Suite 100, Acworth, GA 30102
Phone: (866) 845-5451. Fax: (866) 816-6165
www.acclaim-lighting.com

ACCLAIM
LIGHTING
INTERIOR • OUTDOOR

Please read carefully and save these instructions as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration.

ASSEMBLY AND INSTALLATION

Option 1 Pendant

1. Feed the fixture wire through the rods (Adjust to desired height with the different rods) and canopy assembly. Secure these rods and canopy assembly together using the couplings.
2. Thread the support screws to the cross bar and secure with the hex nut.
3. Secure the cross bar to the outlet box with the mounting screws.
4. Pull out the outlet wire and ground wire from the outlet Box.
5. Make wire connections:
 - The ridged wire (unmarked) from the fixture to white wire from power source.
 - The smooth wire (marked) from the fixture to black wire from power source.
 - Loop the ground wire to cross bar with a green screw.
6. Align the canopy assembly against the outlet box, secure with the ball nuts.
7. Install bulbs: (not included)
(Don't exceed the maximum capacity recommended on the Sockets).

INSTALLATION IS NOW COMPLETED.

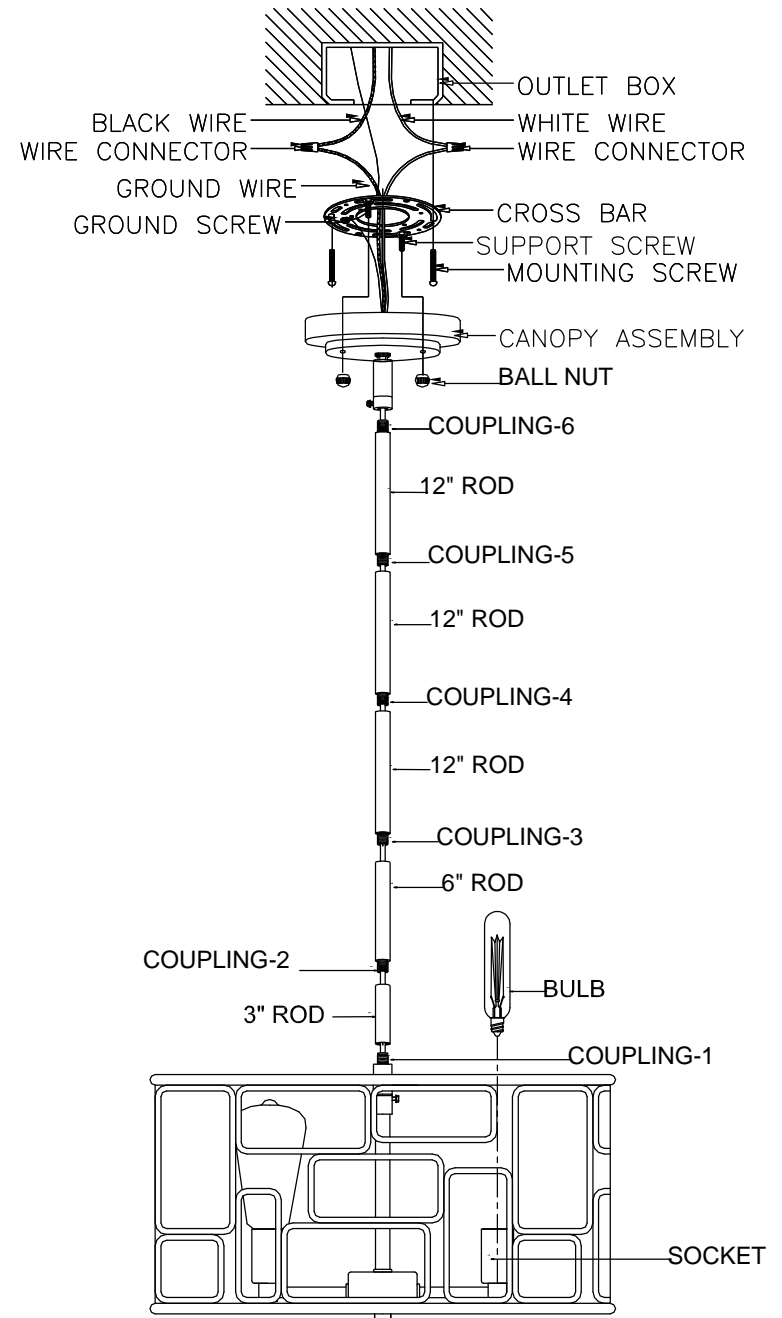

IN21131AS, IN21131BK INSTALLATION INSTRUCTIONS

1500 Cherokee Parkway, Suite 100, Acworth, GA 30102
Phone: (866) 845-5451. Fax: (866) 816-6165
www.acclaim-lighting.com

ACCLAIM
LIGHTING
INTERIOR • OUTDOOR

Please read carefully and save these instructions as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration.

ASSEMBLY AND INSTALLATION

Option 2 Flush mount

1. Feed the fixture wire through canopy assembly. Screw canopy assembly together with the coupling-1.
2. Thread the support screws to the cross bar and secure with the hex nut.
3. Secure the cross bar to the outlet box with the mounting screws.
4. Pull out the outlet wire and ground wire from the outlet Box.
5. Make wire connections:
 - The ridged wire (unmarked) from the fixture to white wire from power source.
 - The smooth wire (marked) from the fixture to black wire from power source.
 - Loop the ground wire to cross bar with a green screw.
6. Align the canopy assembly against the outlet box, secure with the ball nuts.
7. Install bulbs: (Bulbs not included)
(Don't exceed the maximum capacity recommended on the Sockets).

INSTALLATION IS NOW COMPLETED.

