

## IN41225 / IN41226 / IN41227 INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

### CAUTION

**WARNING:** Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

### GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

### ASSEMBLY AND INSTALLATION

1. Thread the Nipple (8) with lock Nut (9), to the Mounting Plate (6).
2. Secure the Mounting Plate(6) with Mounting Screws (7) to the Outlet Box(1).
3. Pull out the outlet wire and ground wire from the Outlet Box(1). Make wire connections
  - Ribbed/White wire (w/o marking) from light to White wire(2) from power source.
  - Smooth/Black wire (w/o marking) from light to Black wire(3) from power source.
  - Loop the ground wire to Mounting Plate(6) with a Green Screw(5).
4. Attach the Back Plate(10) to the Mounting Plate(6) by inserting the nipple, then lock by turning the ball nut (11) clockwise.
5. Install bulb: (not included)  
(Do not exceed the maximum capacity recommended on the socket).
6. Place the glass shade (12) into the Socket Cup(13) then secure with the Thumb Screws(14).

INSTALLATION IS NOW COMPLETED

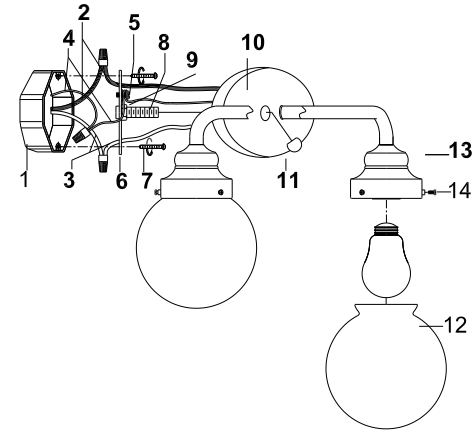

1. OUTLET BOX
2. WHITE WIRE
3. BLACK WIRE
4. GROUNDING WIRE
5. GREEN SCREW
6. MOUNTING PLATE
7. MOUNTING SCREW
8. NIPPLE
9. LOCK NUT
10. BACK PLATE
11. BALL NUT
12. GLASS SHADE
13. SOCKET CUP
14. THUMB SCREWS

